



EXPANDED POLYSTYRENE CONDUIT SLEEVE

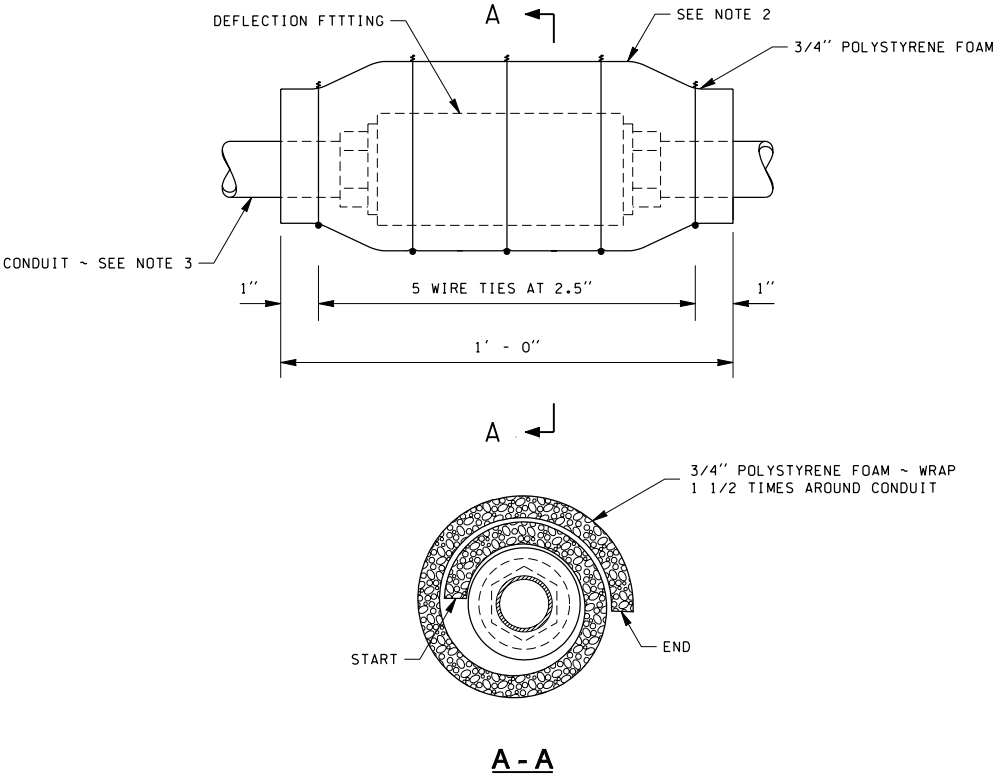

- NOTES:
- 1. EXPANDED POLYSTYRENE FOAM MATERIAL ~ GRAINGER CATALOG, PART NUMBER 3F415.
 - 2. AFTER PLACING WIRE TIES DUCT TAPE SEAMS AND ENDS TO SEAL AND PREVENT CONCRETE FROM BONDING WITH FITTING AND CONDUIT.
 - 3. WRAP STEEL CONDUIT PIPE FOR 1' - 0" ON EACH SIDE OF JOINT. PIPE- WRAP TAPE SHALL BE 2" WIDE, 20 MIL THICK, AND INSTALLED WITH A MINIMUM OF 1" OVERLAP.

FILE NAME G:\Standard Plans\Plan Sheet Library\conduit_sleeve.dgn														 Washington State Department of Transportation		PLOT1	
TIME 10:31:10 AM					REGION NO.	STATE	FED.AID PROJ.NO.										
DATE 04/19/2005					10	WASH											
PLOTTED BY berensb					JOB NUMBER												
DESIGNED BY					CONTRACT NO.		LOCATION NO.				SHEET						
ENTERED BY											OF						
CHECKED BY											SHEETS						
PROJ. ENGR.																	
REGIONAL ADM.		REVISION		DATE	BY					DATE		DATE					
								P.E. STAMP BOX		P.E. STAMP BOX							